



**VISTA  
PROFESSIONAL  
OUTDOOR  
LIGHTING**

# SPECIFICATION SHEET

Type: \_\_\_\_\_

Model: \_\_\_\_\_

Project: \_\_\_\_\_

## CTS Series - STAINLESS STEEL TRANSFORMERS

### SPECIFICATIONS:

**EXTERIOR CONSTRUCTION:**

20-gauge polished, top-grade domestic, 304 stainless steel.

**FINISH:**

Polished stainless steel with Smudge-Free clear powder-coat.

**TRANSFORMER CHARACTERISTICS:**

Available Power Ratings: 300, 600, 900, and 1200 Watts

Primary Voltage: 120 Volts (Also available in 240V, 50 or 60 cycle- Special order only.)

Secondary Voltage: 12 Volts (with High/Low setting)

Fully grounded and isolated with encapsulated core and coil.

**TERMINALS:**

Extra-large terminal strip for multiple low voltage cable connections. A separate 120-volt terminal strip for easy hardwiring and accessory terminal strip for easy installation of external switching devices also included.

**PRIMARY PROTECTION:**

Auto thermal shut-off.

**SECONDARY PROTECTION:**

Resettable high performance magnetic circuit breaker.

**WIRING:**

6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.


**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for landscape lighting transformers (UL 1838).

All Vista transformers are **MADE IN THE U.S.A.**

(See reverse for additional features)

### DIMENSIONS:

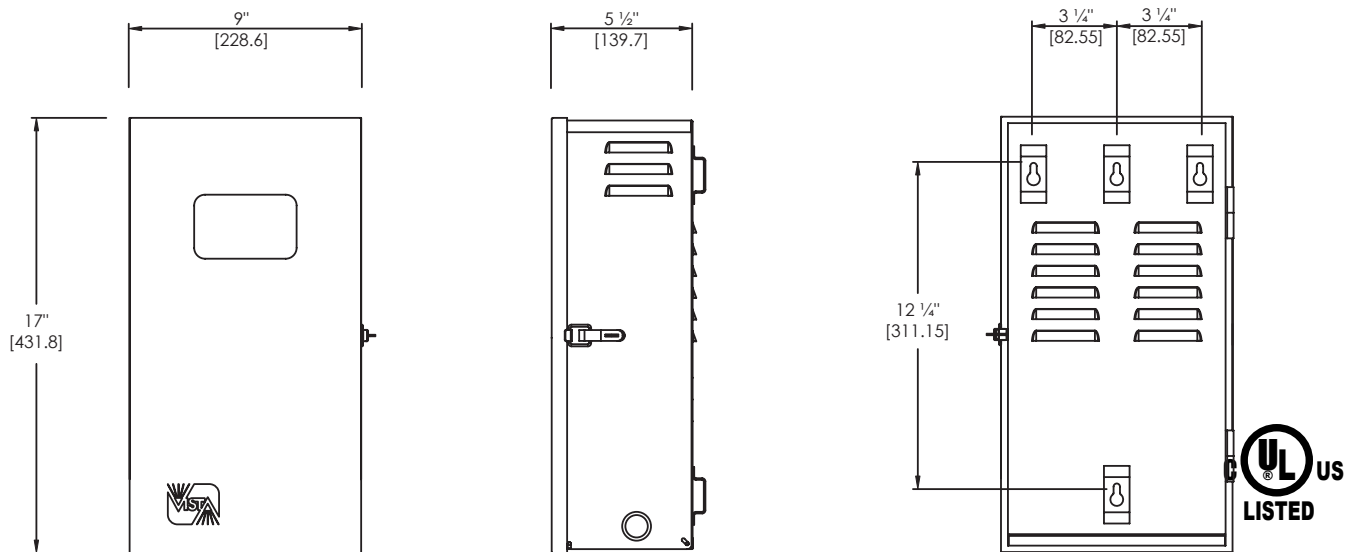

In an effort to improve product design U.S.T.E., Inc. reserves the right to modify the specifications of this fixture.



**TRANSFORMER ORDERING INFORMATION:**

TO ORDER TRANSFORMER: Select appropriate choice from each column as in the following example

EXAMPLE: CTS-900-DT-C

TRANSFORMER SERIES	TRANSFORMER MODEL NUMBER	ACCESSORY OPTIONS	FINISH
CTS- Stainless Steel 12 volt transformer	300- 300 VA 600- 600 VA (300 W x 2) 900- 900 VA (300 W x 3) 1200- 1200 VA (300 W x 4)	T- Removable multi-setting mechanical 24-hour timer DT- Removable multi-setting digital 7-day timer RP- Remote wired photocell with electronic timer  (Accessories not required for operation of transformer)	C- Smudge-free clear powder- coat  B- Black G- Verde BR- Architectural Brick Z- Architectural Bronze GT- Granite P- Pewter TC- Terracotta R- Rust HG- Hunter Green M- Mocha WB- Weathered Bronze WI- Weathered Iron W- White

**Note:** When a finish is not specified, CTS transformers will be shipped with a clear, polyester, powder-coated finish.

**FEATURES:**

- Custom-designed, weathertight casing seals components from moisture and debris. Vista's *Smudge-Free* clear powder-coat ensures a like-brand-new look for years to come.
- Take-apart stainless steel hinges for easy door removal allowing greater access during installation.
- Water-resistant weatherstripping around door seal.
- Easy to read instructions mounted inside door.
- Magnetic overload circuit breakers for reliable automatic circuit protection under all conditions. A rocker switch may also be used for manual on/off switching.
- Over-sized wiring compartment makes cable installation easy.
- 1/2"-3/4" knockouts on each side of enclosure for conduit and accessory mounting as well as a removable, swing-down enclosure bottom with Adjustable Cable Raceway Feeder and multiple 1/2"-3/4" and 2" knockouts.
- Extra-large terminal strip for multiple low voltage cable connections.
- Separate accessory terminal strip for easy installation of optional photo-cell, motion sensor, or other external switching devices.
- 6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.
- 120-volt Accessory receptical for use with optional, removable multi-setting mechanical 24-hour timer or electronic/digital 7-day timer (with battery back-up).
- Lockable, stainless steel latch can be secured to prevent tampering.
- Discrete louvered vents in the rear and sides of the cabinet maintain a cool operating temperature.
- 120-volt terminal strip for easy hardwiring.
- Optional photocell is available for use with timers or stand-alone.
- Electronic timer and remote photocell combination standard in RP models.
- UL Listed to U.S. and Canadian safety standards for landscape lighting transformers (UL 1838).
- Tester kit and mounting template included.
- Also available in 240V, 50 or 60 cycle- Special order only.